
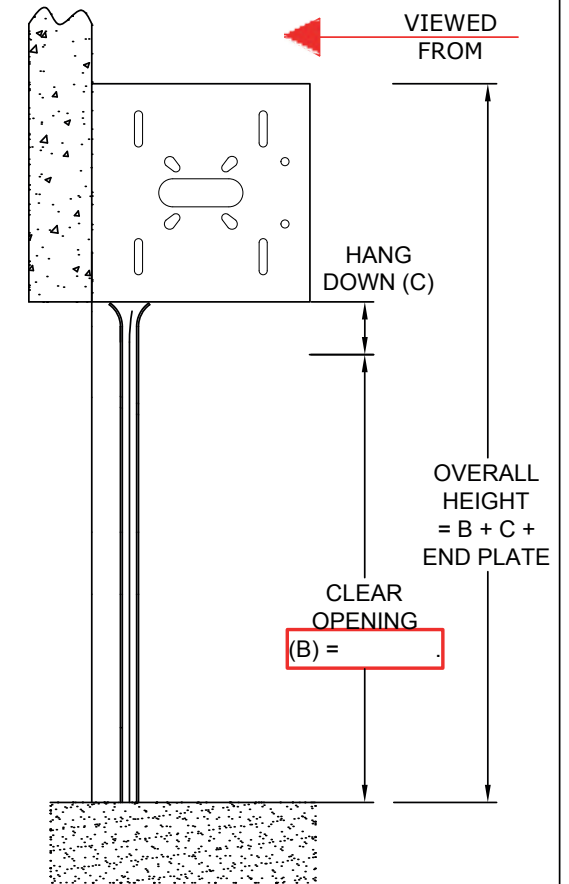


SECEURODOOR INDUSTRIAL DOOR - FACE FIX - 75 77 95 100

THIS DRAWING MUST BE RETURNED WITH AN ORDER FORM

SINGLE PHASE POWER:	3 PHASE POWER:		GUIDE SIZE - 20g/22g (75x50 Guide Angle) (Straight) = G	<input type="checkbox"/>	65	100
			GUIDE SIZE - 20g/22g (75x50 Guide Angle) (Wind) = G	<input type="checkbox"/>	65	100
INSET ANGLE	<input type="checkbox"/>	OUTSET ANGLE	GUIDE SIZE - 77mm Insulated Slat (75x50 Guide Angle) = G	<input type="checkbox"/>	95	
			GUIDE SIZE - 95mm / 100mm Insulated Slat (100x50 Guide Angle) (Straight) = G	<input type="checkbox"/>	80	
END PLATE:	350	400	450	500	550	
			GUIDE SIZE - 95mm Insulated Slat (100x50 Guide Angle) (Wind) = G	<input type="checkbox"/>	80	

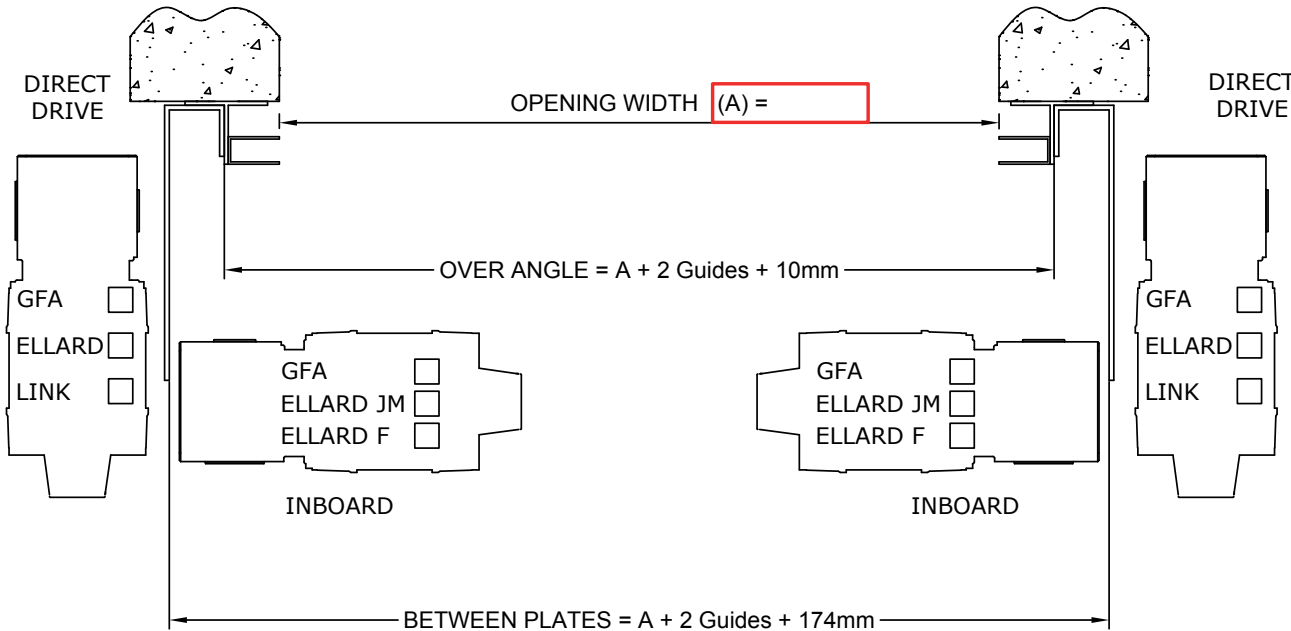

STRUCTURE MUST BE CAPABLE OF CARRYING SHUTTER WEIGHT APPROX 25Kg / Sqm

END PLATE SELECTION BY OPENING HEIGHT

NOT TO SCALE		QUANTITY:	COMPANY:	JOB REF:	Hang Down	350	400	450	500	550	
DRAWN BY:	PPC				20G	50mm	2-3.8m	3.8-5m	5-6m	6-7m	
DATE:	09/10/15				22G	50mm	2-3.8m	3.8-5m			
REV:	4	SIGNATURE:	DATE:	77	80mm	2-3m	3-4m	4-5m			
DWG NO.:	INDUS001			95	100mm	2-3m	3-4m	4-5m	5-6m	6-7m	
				100	100mm		2-3.5m	3.5-4.5m	4.5-5.8m	5.8-7m	