REVISION 4

SECEURODOOR INDUSTRIAL DOOR - REVEAL FIX - 75 ☐ 77 ☐ 95 ☐ 100 ☐

THIS DRAWING MUST BE RETURNED WITH AN ORDER FORM

SINGLE PHASE POWER:		3 PHASE POWER:	
OUTSET ANGLE			
END PLATE:	350 ☐	400 ☐	450 ☐ 500 ☐ 550 ☐

GUIDE SIZE - 20g/22g (75x50 Guide Angle) (Straight) = G	65		100	
GUIDE SIZE - 20g/22g (75x50 Guide Angle) (Wind) = G	65		100	
GUIDE SIZE - 77mm Insulated Slat (75x50 Guide Angle) = G			95	
GUIDE SIZE - 95mm / 100mm Insulated Slat (100x50 Guide Angle) (Straight) = G			80	
GUIDE SIZE - 95mm Insulated Slat (100x50 Guide Angle) (Wind) = G			80	

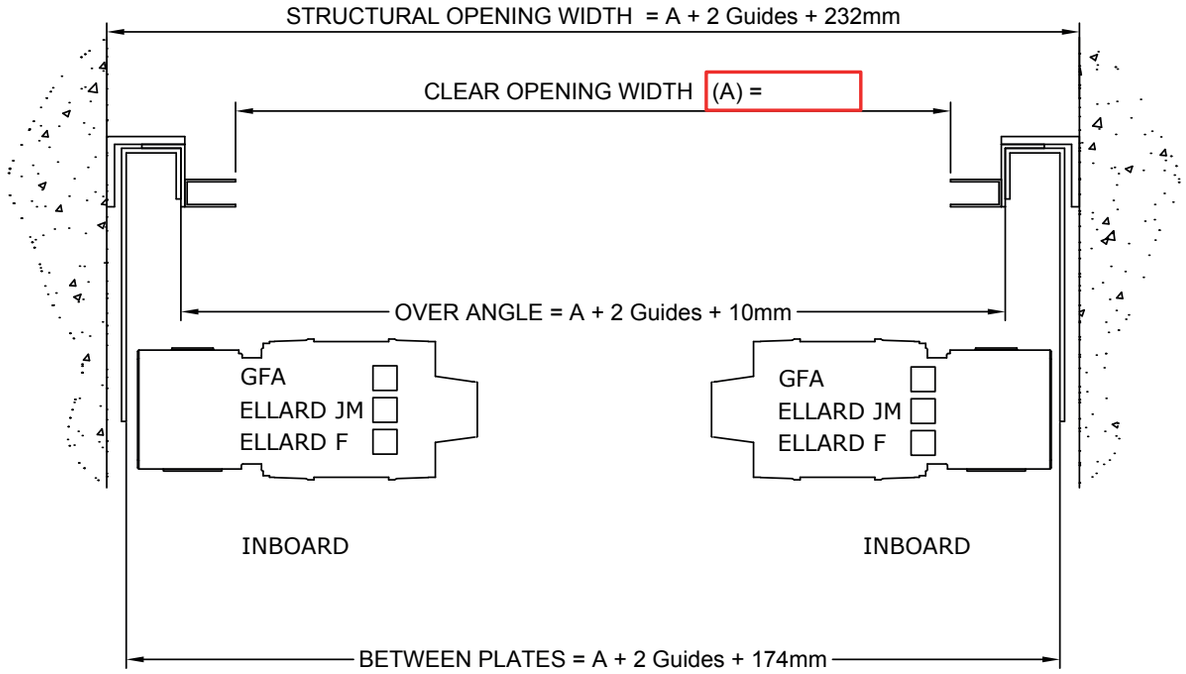

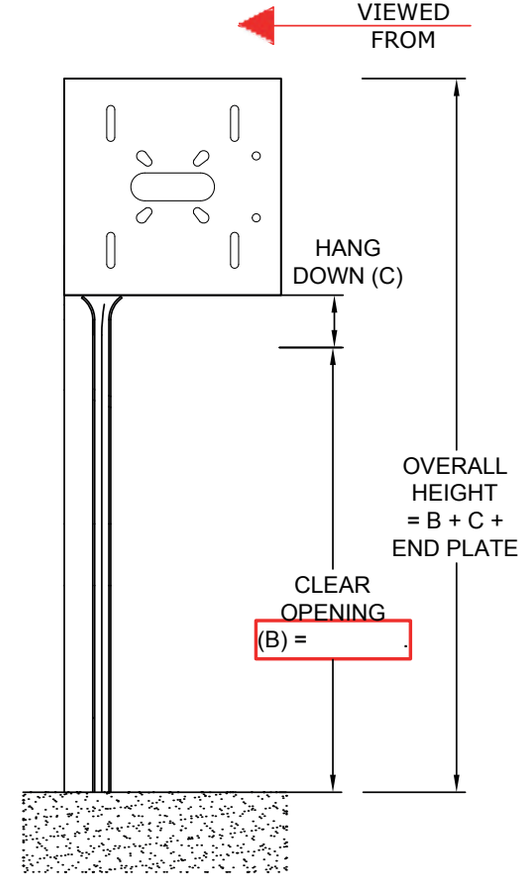

STRUCTURE MUST BE CAPABLE OF CARRYING SHUTTER WEIGHT APPROX 25Kg / Sqm

NOT TO SCALE		QUANTITY:	COMPANY:
DRAWN BY:	PPC		
DATE:	09/10/15		JOB REF:
REV:	4		
DWG NO.:	INDUS002		SIGNATURE:
			DATE:

END PLATE SELECTION BY OPENING HEIGHT

	Hang Down	350	400	450	500	550
20G	50mm	2-3.8m	3.8-5m	5-6m	6-7m	
22G	50mm	2-3.8m	3.8-5m			
77	80mm	2-3m	3-4m	4-5m		
95	100mm	2-3m	3-4m	4-5m	5-6m	6-7m
100	100mm		2-3.5m	3.5-4.5m	4.5-5.8m	5.8-7m